





REV.	EDN NO.	DATE	SIGN	DESCRIPTION
AA	LE31430343	2014/03/25	Xiaoyun	Add glue.

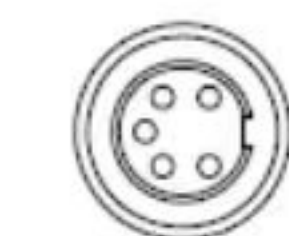

Conn. 2
F Conn F Pin
(Mates to Motor)

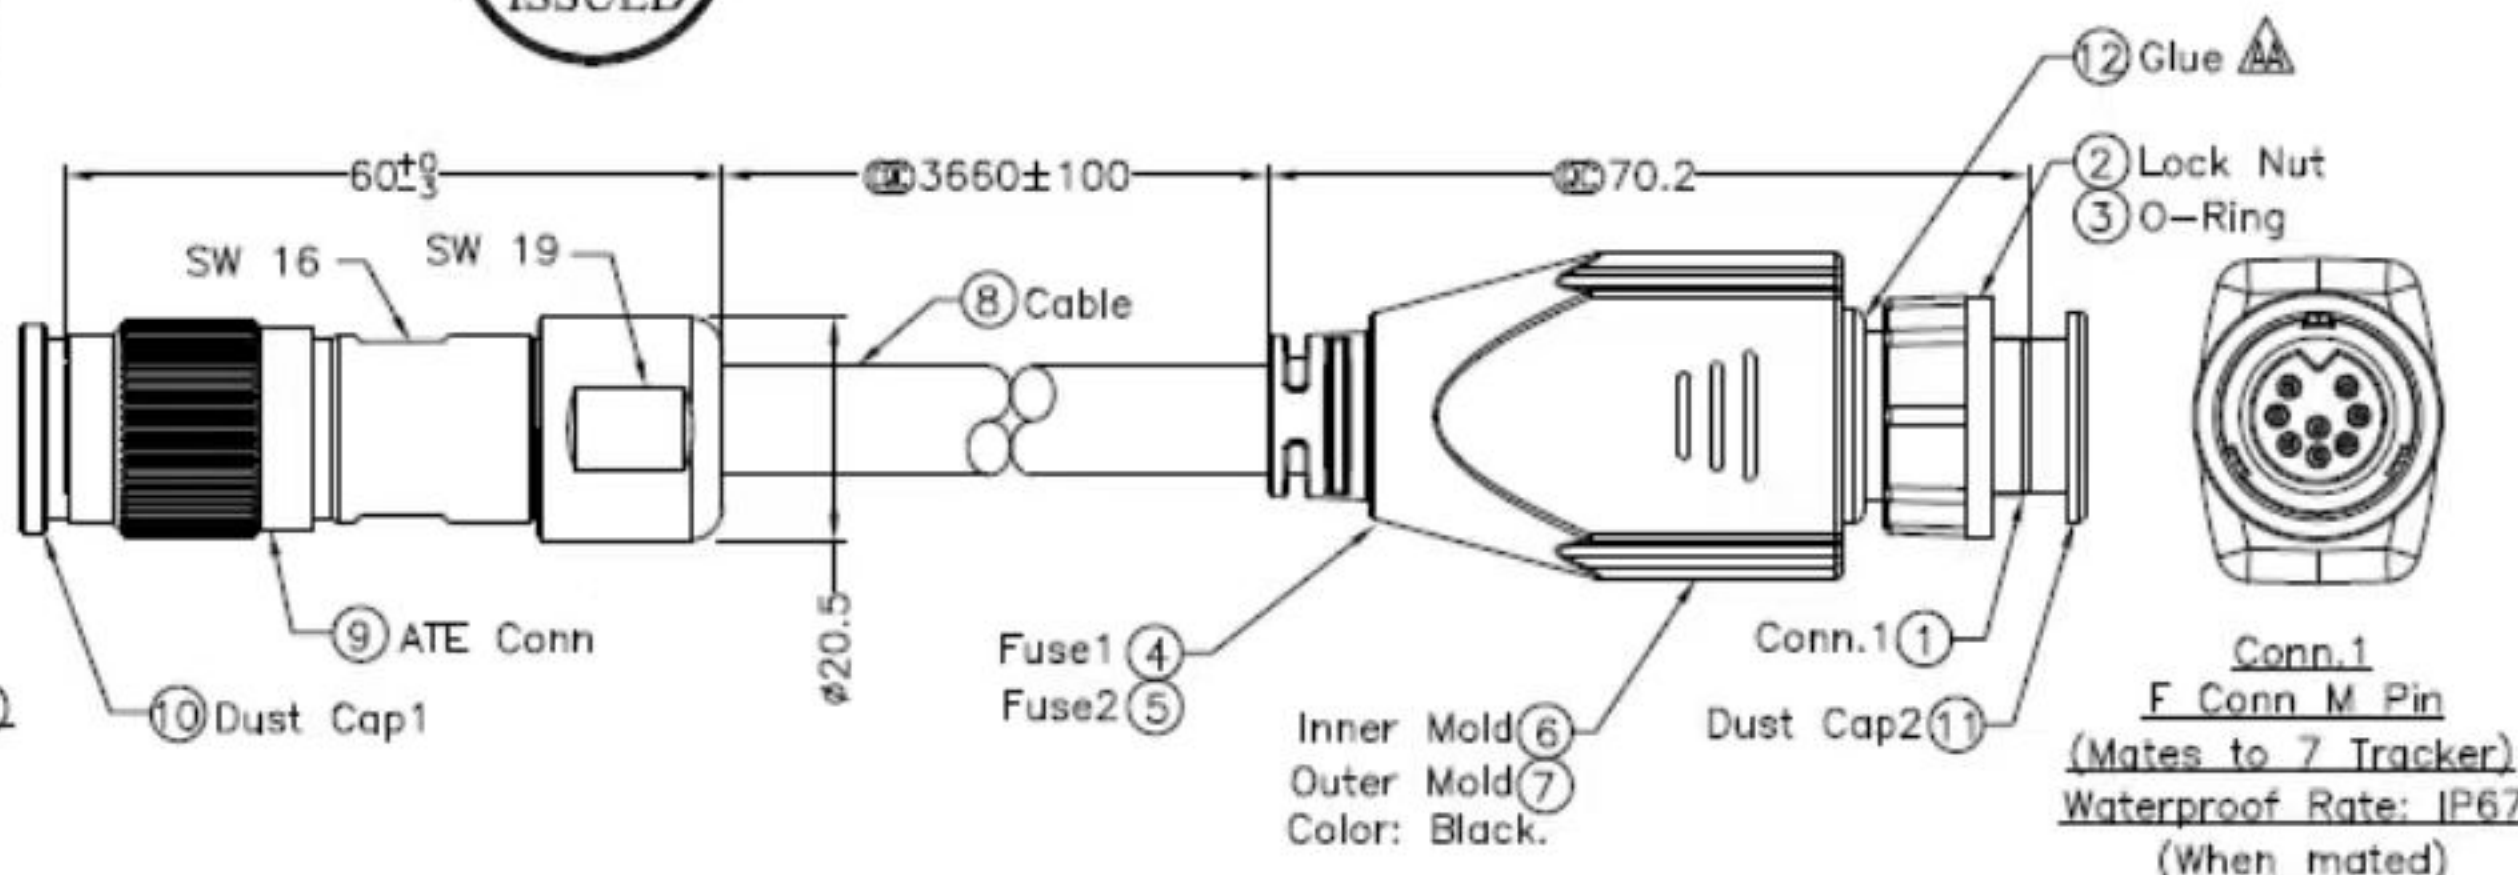

Conn. 2
Pin Assignments
Front View



Conn. 1
Pin Assignments
Front View

4	Brown 棕 (24AWG)	Twist Pair	8
5	White 白 (24AWG)		7
3	Red 紅 (18AWG)	6Amp Fuse	5
2	Black 黑 (18AWG)		6
1	Green 綠 (18AWG)	1Amp Fuse	4
	Drain 地線		3
4	Blue 藍 (24AWG)	Twist Pair	2
5	Purple 紫 (24AWG)		1
Conn.2	Wire Color		Conn.1
Pin Out			

Note:

- * Conn.1: Nylon+GF, Black.
Male Pins: Copper Alloy, Gold Plated.
8Pins, 5Amps, 24 Volts
- * Cable: UL21388 3*18#+(2*2P*24#+DRAIN)+F
PVC Jacket UV Resistance, OD=10.5, Black.
- * Temperature Rating: -30°C~80°C.
- * All Parts Are UV Resistant

UNIT:mm
TOLERANCE
±0.5 mm

TITLE
Motor trunk Cable
SCALE Free
SHEET 1 OF 1
REV. AA
SIZE A4
Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO 504385
DWG NO 504385
CUSTOMER LT003351
DRAWN BY Xiaoyun
CHECKED BY Dominic
APPROVED BY Denys
DATE 2014/03/25
DATE 2014/03/25
DATE 2014/03/25

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

